


Technical data sheet

Grip 20 flame-resistant

Item number: 2205412

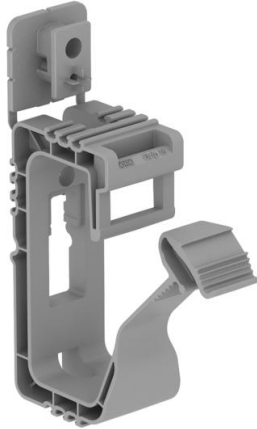

Cable tidy for general use, suitable for wall and ceiling mounting. The moulded fastening element can be fastened using knock-in anchors or a gas pressure nail gun.

Flame-resistant version, stone grey, to DIN VDE 0471/DIN IEC 695 Part 2-1, test temperature 960°C. The recommended fastening spacing when assigned fully is 250–400 mm.

With multifunctional fastening element.

Capacity: 2031/ 20 max. 20 cables NYM 3 x 1.5 mm²



PP Polypropylene

Master data

Item number	2205412
Type	2031 F 20
Description 1	Grip collecting clamp
Description 2	flame-resistant to 960°C
Manufacturer	OBO
Dimension	20x NYM3x1,5
Colour	Stone grey; RAL 7030
Material	Polypropylene
Smallest sales unit	50
Unit of quantity	Piece
Weight	1.92 kg
Weight unit	kg/100 pc.

Technical data

No. of conductors NYM 3 x 1.5	20
Flame-resistant version	yes
Breaking load	0.32 kN
Flame-resistant	Acc. to VDE 0471/DIN 695 Part 2-1, test temperature 960 °C
Maintain electrical functions	no
Halogen-free	yes
With anchor	no