

# Tehnicki list

## Spojnica kanala i lajsna praga

Broj artikla: 6113210



Spojnica kanala za donji deo Rapid 45-2 parapetnih kanala za sakrivanje isečenih ivica i za besprekorno spajanje segmenata kanala. Spojnice kanala se montiraju uskočno. Odgovara za širine kanala 130 mm.



Polikarbonat/Akrilnitril-Butadien-Stirol

### Matični podaci

|                            |  |
|----------------------------|--|
| Broj artikla               | 6113210                                  |
| Tip                        | GK-KS45-2RW                              |
| Oznaka 1                   | Poklopac praga - spojnica                |
| Oznaka 2                   | za Rapid 45-2 130                        |
| Proizvođač                 | OBO                                      |
| Dimenzija                  | 133x55x15                                |
| Boja                       | čisto bela; RAL 9010                     |
| Materijal                  | Polikarbonat/akrilnitril-butadien-stirol |
| Najmanja prodajna jedinica | 6  |
| Jedinica količine          | Komad                                    |
| Težina                     | 0,707 kg                                 |
| Jedinica težine            | kg/100 pari                              |


# Tehnicki list

## Spojnica kanala i lajsna praga

Broj artikla: 6113210



### Dimenzije

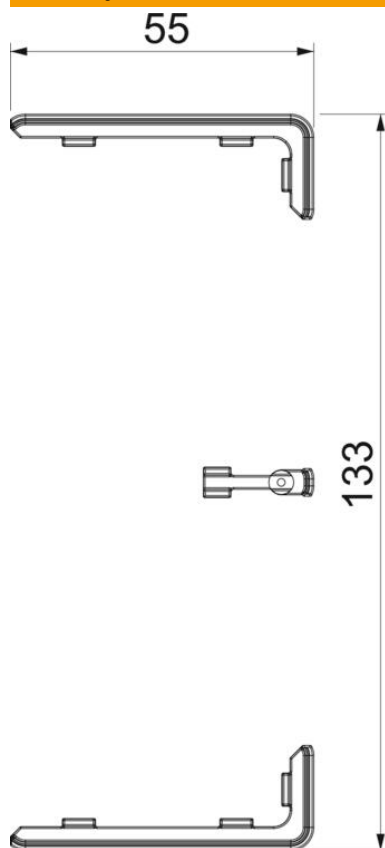

|        |       |
|--------|-------|
| Dužina | 15 mm |
| Širina | 55 mm |
| Visina | 17 mm |

### Tehnički podaci

|                                   |                       |
|-----------------------------------|-----------------------|
| Varijanta                         | Kaširanje reza kanala |
| Vrsta pričvršćivanja              | Guranje (pre montaže) |
| Oblik                             | simetrično            |
| za širinu kanala                  | 130 mm                |
| za visinu kanala                  | 53 mm                 |
| bez halogena                      | da                    |
| Širina poklopca                   | 45 mm                 |
| Vrsta zaštite                     | IP40                  |
| Stepen zaštite IK-kod             | IK08                  |
| Temperaturna oblast primene maks. | 60 °C                 |
| Temperaturna oblast primene min.  | -15 °C                |