

# Technical data sheet

## Height-adjustable cassette with cord outlet, RКСN, brass

Item number: 7409202



Height-adjustable cassette of nominal size 4 with cord outlet for installation of accessories in dry-care floors for indoor use.

Height-adjustable cassette for cord outlet, 2-compartment. 2 APMT2 cover plates can be installed. For the installation of 2 UT3 universal supports for 4 individual installation devices with support ring/support clamp or 6 Modul 45 devices.



### Master data

|                     |                  |
|---------------------|------------------|
| Item number         | 7409202          |
| Type                | RКСN2 4 MS 20    |
| Description 1       | Square cassette  |
| Description 2       | with cord outlet |
| Manufacturer        | OBO              |
| Dimension           | 200x200mm        |
| Material            | Brass            |
| Smallest sales unit | 1                |
| Unit of quantity    | Piece            |
| Weight              | 322.4 kg         |
| Weight unit         | kg/100 pc.       |


# Technical data sheet

## Height-adjustable cassette with cord outlet, RKSN, brass

Item number: 7409202



### Dimensions

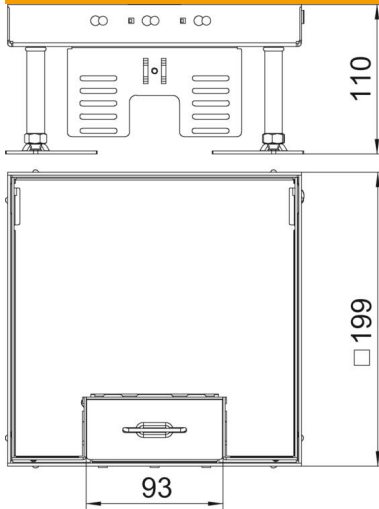

Dimension h 105 mm

### Technical data

|  |                         |
|--|-------------------------|
| Number of installable devices              | 6                       |
| Number of mounting boxes                   | 2                       |
| Number of cable outlets                    | 1                       |
| Version for                                | Square                  |
| Cable outlet version                       | Swivellable cord outlet |
| Floor care                                 | Dry                     |
| Decouplable                                | no                      |
| Floor height, max.                         | 150 mm                  |
| Floor height, min.                         | 105 mm                  |
| Suitable for raised floor installation     | yes                     |
| Suitable for cavity floor installation     | yes                     |
| Suitable for underfloor box                | 250/350                 |
| Device support to accept mounting boxes    | yes                     |
| Length of installation dimensions          | 201 mm                  |
| Nominal size for device installation units | 4                       |
| Height-adjustment range, max.              | 150 mm                  |
| Height-adjustment range, min.              | 105 mm                  |
| Protection rating (IP) when used           | IP20                    |
| Protection rating (IP) when unused         | IP40                    |
| Protection rating IK code                  | IK10                    |
| Heavy-duty version                         | no                      |
| Installation system type                   | UT3                     |
| Vertical load, large area                  | to 5,000 N              |
| Vertical load, small area                  | to 3,000 N              |
| Approvals                                  | VDE                     |
| Floor covering thickness                   | 20 mm                   |