Technical data sheet

Height-adjustable cassette with cord outlet, RKSN, brass



Item number: 7409204



Height-adjustable cassette of nominal size 4 with cord outlet for installation of accessories in dry-care floors for indoor use. Height-adjustable cassette for cord outlet, 2-compartment. 2 APMT2 cover plates

Height-adjustable cassette for cord outlet, 2-compartment. 2 APMT2 cover plates can be installed. For the installation of 2 UT3 universal supports for 4 individual installation devices with support ring/support clamp or 6 Modul 45 devices.





Brass

Master data


Item number	7409204
Type	RKSN2 4 MS 25
Description 1	Square cassette
Description 2	with cord outlet
Manufacturer	OBO
Dimension	200x200mm
Material	Brass
Smallest sales unit	1
Unit of quantity	Piece
Weight	328 kg
Weight unit	kg/100 pc.

Technical data sheet

Height-adjustable cassette with cord outlet, RKSN, brass



Item number: 7409204

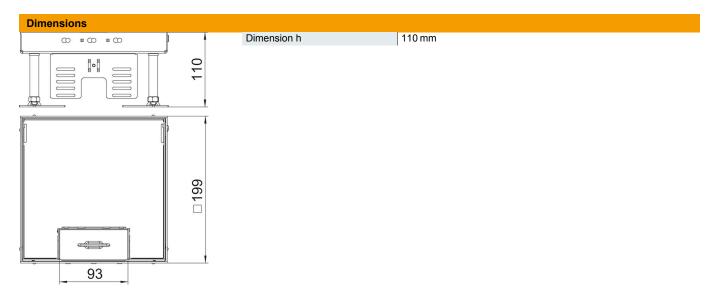

Technical data

Number of installable devices Number of mounting boxes Number of cable outlets Version for Cable outlet version Floor care Dry Decouplable Floor height, max. Floor height, min. Suitable for raised floor installation Suitable for underfloor box Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, min. Protection rating (IP) when used Protection rating IK code Heavy-duty version Installation system type Vertical load, large area Vertical load, small area Square		
Number of cable outlets Version for Cable outlet version Floor care Dry Decouplable Floor height, max. Floor height, min. Suitable for raised floor installation Suitable for cavity floor installation Suitable for underfloor box Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, min. Protection rating (IP) when used Protection rating IK code Protection rating IK code Heavy-duty version Installation system type Vertical load, large area Protection for Square Swivellable cord outlet Square Square Suitable for raised floor installation yes Scolors Scolors Square Swivellable cord outlet Square Square Spuare Square Spuare Square Square Spuare Square Spuare Square Spuare Square Sq	Number of installable devices	
Version for Square Cable outlet version Swivellable cord outlet Floor care Dry Decouplable no Floor height, max. 155 mm Floor height, min. 110 mm Suitable for raised floor installation Suitable for cavity floor installation Suitable for underfloor box 250/350 Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, min. Height-adjustment range, min. Protection rating (IP) when used Protection rating IK code Heavy-duty version Installation system type Vertical load, large area Protection value Square Swivellable cord outlet Swivellable cord outles Swivellable for cavity one Swivellable for	Number of mounting boxes	2
Cable outlet version Floor care Dry Decouplable Floor height, max. Floor height, min. Suitable for raised floor installation Suitable for cavity floor installation Suitable for cavity floor installation Suitable for underfloor box Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating IK code Protection rating IK code IN10 Installation system type Vertical load, large area Swivellable cord outlet Dry Dry Dry Dry Dry Dry Dry Dry	Number of cable outlets	1
Ploor care Decouplable Decouplable Ploor height, max. Ploor height, min. Suitable for raised floor installation Suitable for raised floor installation Suitable for cavity floor installation Suitable for underfloor box Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Heavy-duty version Installation system type Vertical load, large area Dry no 110 mm yes 250/350 yes 250/350 yes 250/350 yes 150 mm 4 10 mm Ploor IP40 IP40 IP40 Vertical load, large area Dry IP40 IV3 Vertical load, large area Incomplete in the minuses of the mi	Version for	Square
Decouplable no Floor height, max. 155 mm Floor height, min. 110 mm Suitable for raised floor installation Suitable for cavity floor installation Suitable for underfloor box 250/350 Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, max. 155 mm Height-adjustment range, min. 110 mm Protection rating (IP) when used IP20 Protection rating (IP) when unused Protection rating IK code Heavy-duty version Installation system type Vertical load, large area 155 mm Height-adjustment range, min. 110 mm IP40 IP40 IP40 Vertical load, large area To Somm Toto Common	Cable outlet version	Swivellable cord outlet
Floor height, max. Floor height, min. Suitable for raised floor installation Suitable for cavity floor installation Suitable for underfloor box Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Heavy-duty version Installation system type Vertical load, large area 155 mm 155 mm 110 mm	Floor care	Dry
Floor height, min. Suitable for raised floor installation Suitable for cavity floor installation Suitable for underfloor box Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Heavy-duty version Installation system type Vertical load, large area 110 mm yes 250/350 yes 201 mm 4 105 mm 110 mm 110 mm 1120 IP40 I	Decouplable	no
Suitable for raised floor installation Suitable for cavity floor installation Suitable for underfloor box Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Heavy-duty version Installation system type Vertical load, large area yes yes 250/350 yes 201 mm 4 105 mm 110 mm 1120 IP40	Floor height, max.	155 mm
Suitable for cavity floor installation Suitable for underfloor box Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Heavy-duty version Installation system type Vertical load, large area 250/350 yes 250/350 yes 100 mm 100 mm 110 mm 110 mm 1120 IP40 IP40 IP40 IP40 IP40 IP40 IP40 IP4	Floor height, min.	110 mm
Suitable for underfloor box Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Heavy-duty version Installation system type Vertical load, large area 250/350 yes 100 mm 100 mm 110 mm 1120 1120 1120 1120 1121 1221 1231 123		yes
Device support to accept mounting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Protection rating IK code IK10 Heavy-duty version Installation system type Vertical load, large area yes 201 mm 4 155 mm 110 mm IP20 IP40 IP40 IP40 UT3 Vertical load, large area	Suitable for cavity floor installation	yes
ting boxes Length of installation dimensions Nominal size for device installation units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Protection rating IK code IK10 Heavy-duty version Installation system type Vertical load, large area 201 mm 155 mm 110 mm IP20 IP40 IP40 IP40 IP40 IP40 IP40 IP40 IP4	Suitable for underfloor box	250/350
Nominal size for device installation units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Protection rating IK code IK10 Heavy-duty version Installation system type Vertical load, large area 155 mm 110 mm IP20 IP40 IP40 IP40 IV73 IV73 IV73 IV73 IV73 IV73 IV73 IV74 IV75 IV75 IV75 IV75 IV75 IV75 IV75 IV75		yes
on units Height-adjustment range, max. Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Protection rating IK code IK10 Heavy-duty version Installation system type Vertical load, large area 155 mm 110 mm IP20 IP40 IP40 IP40 IP40 IP40 IP40 IP40 IP4	Length of installation dimensions	201 mm
Height-adjustment range, min. Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Protection rating IK code Heavy-duty version Installation system type Vertical load, large area 110 mm IP20 IP40 IP40 IP40 IV13 IV10 IV10 IV10 IV10 IV10 IV10 IV10 IV10		4
Protection rating (IP) when used Protection rating (IP) when unused Protection rating IK code Protection rating IK code Heavy-duty version Installation system type Vertical load, large area IP20 IP40 IP40 IP40 IP40 IP40 IP40 IP40 IP4	Height-adjustment range, max.	155 mm
Protection rating (IP) when unused Protection rating IK code IK10 Heavy-duty version no Installation system type UT3 Vertical load, large area to 5,000 N	Height-adjustment range, min.	110 mm
Protection rating IK code IK10 Heavy-duty version no Installation system type UT3 Vertical load, large area to 5,000 N	Protection rating (IP) when used	IP20
Heavy-duty version no Installation system type UT3 Vertical load, large area to 5,000 N		IP40
Installation system type UT3 Vertical load, large area to 5,000 N	Protection rating IK code	IK10
Vertical load, large area to 5,000 N	Heavy-duty version	no
, ,	Installation system type	UT3
Vertical load, small area to 3,000 N	Vertical load, large area	to 5,000 N
	Vertical load, small area	to 3,000 N
Approvals VDE	Approvals	VDE
Floor covering thickness 25 mm	Floor covering thickness	25 mm