

Technical data sheet

UDHOME-ONE floor socket, with floor covering recess, BS socket, brass

Item number: 7368310



Square floor socket for use in dry-care systems and screed floors in indoor areas. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 85 mm, the height adjustment range +20 mm. Frame and cover made of brass and visible in the floor covering. Cover with floor covering recess. The load-bearing capacity of 15 kN is only guaranteed when in an unused state. The delivery includes a switched BS socket.



 Brass

Master data

| | |
|---------------------|------------------------------|
| Item number | 7368310 |
| Type | UDHOME-ONE M15BS |
| Description 1 | Floor socket |
| Description 2 | BS socket, 15mm floor recess |
| Manufacturer | OBO |
| Dimension | 140x140x85 |
| Material | Brass |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 227 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

UDHOME-ONE floor socket, with floor covering recess, BS socket, brass


Item number: 7368310



Dimensions

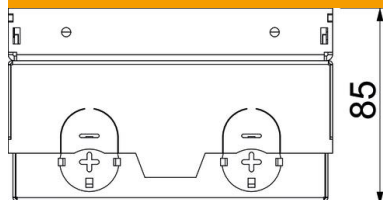

| | |
|--------|--------|
| Length | 140 mm |
| Width | 140 mm |
| Height | 85 mm |

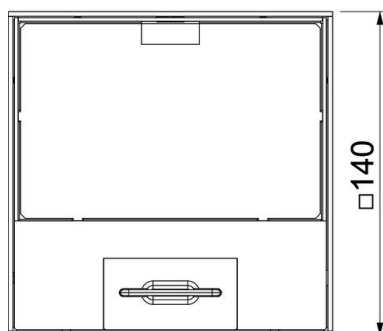

Technical data

| | |
|---|-------------------------|
| Number of sockets according to the British standard | 1 |
| Cable outlet version | Swivellable cord outlet |
| Equipment | Single BS socket |
| Floor covering protection frame | no |
| Floor care | Dry |
| Cover version | Floor covering recess |
| Seal installation option | no |
| Application when used | 6.101.1 Dry floor care |
| Application when unused | 6.101.1 Dry floor care |
| Floor height, max. | 105 mm |
| Floor height, min. | 85 mm |
| Suitable for raised floor installation | yes |
| Suitable for screed-flush closed underfloor ducts | no |
| Suitable for screed-covered underfloor ducts | no |
| Suitable for cavity floor installation | yes |
| Suitable for wet care | no |
| Suitable for underfloor ducts | no |
| Device support to accept mounting boxes | no |
| With floor covering recess | yes |
| Protection rating (IP) when used | IP20 |
| Protection rating (IP) when unused | IP40 |
| Protection rating IK code | IK10 |
| Heavy-duty version | no |

Technical data sheet

UDHOME-ONE floor socket, with floor covering recess, BS
socket, brass

Item number: 7368310



Technical data

| | |
|---------------------------|-------------|
| Vertical load, large area | to 15,000 N |
| Vertical load, small area | to 3,000 N |
| Opening mechanism | Handle |
| Floor covering thickness | 15 mm |