


Technical data sheet

UZD250-4 SO junction and branch box

Item number: 7410010



Junction and branch box for screed-covered underfloor installation duct with sheet steel side walls. For mounting of installation units in the mounting cover (to be ordered separately). Can be infinitely adjusted to a nominal screed height of 115–160 mm using the quick height-adjustment unit. The screed can be worked up to be flush with the screed draw-off edge. With noise decoupling option after screed laying and can also be used with system accessories for heavy-duty applications. Insertion of cables with the 2-part EÜK duct.



St Steel

FS Strip galvanized

Master data

| | |
|---------------------|------------------------------|
| Item number | 7410010 |
| Description 1 | Junction and branch box |
| Description 2 | for screed height 115-160 mm |
| Manufacturer | OBO |
| Dimension | 400x380x80 |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 466 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

UZD250-4 SO junction and branch box

Item number: 7410010



Dimensions

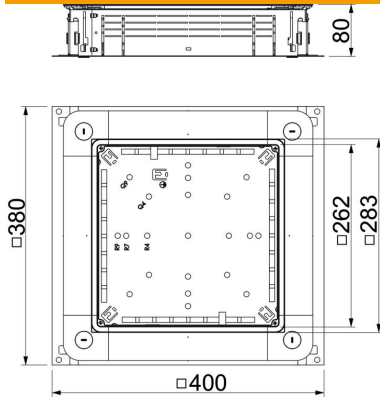

| | |
|-------------|--------|
| Dimension a | 262 mm |
| Dimension A | 380 mm |
| Dimension B | 400 mm |
| Dimension b | 283 mm |

Technical data

| | |
|---|-----------|
| Number of installable devices | 1 |
| Floor plate | yes |
| Cover version | Universal |
| Seal installation option | yes |
| Installation opening for on-floor tank | no |
| Installation opening for flush-mount unit | Square |
| Decouplable | yes |
| Screed height, max. | 160 mm |
| Screed height, min. | 115 mm |
| For pipe connection | no |
| Suitable for screed-flush closed underfloor ducts | no |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for underfloor ducts | yes |
| Trunking width, max. | 250 mm |
| Trunking width, min. | 190 mm |
| Trunking height, max. | 58 mm |
| Duct height, min. | 28 mm |
| Minimum screed height | 115 |
| Nominal size | 250 mm |
| Height-adjustment range, max. | 160 mm |
| Height-adjustment range, min. | 115 mm |
| Protection rating (IP) when used | IP20 |