## **Technical data sheet**

## HoverCube VH-4, 4x earthing pin socket, with compressed air connection

**Item number: 6109816** 





Housing equipped and pre-wired, with 1 m pipe 1/2" and connection for compressed air hose 13 x 3.5 mm and 2-way distributor 1/2", with suspension lug, grip hook and four cover plates.

Equipped as follows: 4x single sockets with earthing pin 16 A/250 V with increased touch protection, pre-wired for two AC currents, connection via 2x 3-pin terminals, 1x CEE socket

16 A/415 V, with partition for circuit separation.



PA

Polyamide

## Master data


| Item number         | 6109816                      |
|---------------------|------------------------------|
| Туре                | VH-4L 4SF                    |
| Description 1       | HoverCube                    |
| Description 2       | IP20, air, grip, NF-equipped |
| Manufacturer        | OBO                          |
| Dimension           | 140x140x1100                 |
| Colour              | Graphite black; RAL 9011     |
| Material            | Polyamide                    |
| Smallest sales unit | 1                            |
| Unit of quantity    | Piece                        |
| Weight              | 428.6 kg                     |
| Weight unit         | kg/100 pc.                   |

## **Technical data sheet**

HoverCube VH-4, 4x earthing pin socket, with compressed air connection





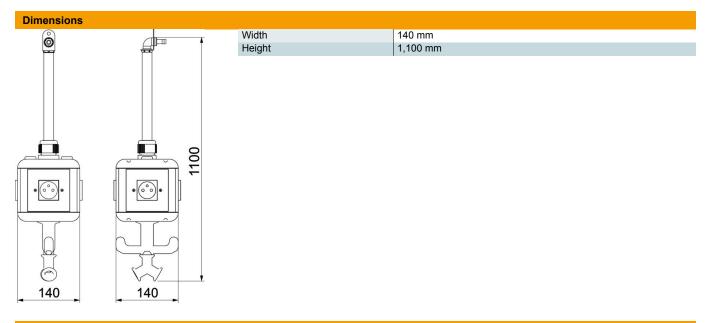

| Te |  |  |  |
|----|--|--|--|

| Number of SCHUKO sockets               | 0             |
|--|---------------|
| CEE socket, 125 A                      | Without       |
| CEE socket, 16 A                       | Without       |
| CEE socket, 32 A                       | Without       |
| CEE socket, 63 A                       | Without       |
| Supply/connection option               | Miscellaneous |
| FI protection switch                   | Without       |
| Handling                               | abhängbar     |
| Military version                       | no            |
| Protection rating                      | IP20          |
| Other installations and/or empty slots | 5             |
| Depth                                  | 140 mm        |