

Technical data sheet

Plastic pipe, rigid, halogen-free

Item number: 2047721



Electrical installation pipe system made of halogen-free plastic, to EN 61386 (Code: 44321) for the mechanical protection of cables.



Polycarbonate/Acrylnitrile-butadiene-styrene

Master data

| | |
|---------------------|--|
| Item number | 2047721 |
| Type | KH20 LGR |
| Description 1 | Plastic armoured pipe |
| Description 2 | halogen-free |
| Manufacturer | OBO |
| Dimension | Ø20, 3000mm |
| Colour | Light grey; RAL 7035 |
| Material | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 57 |
| Unit of quantity | Metre |
| Weight | 11 kg |
| Weight unit | kg/100 m |


Technical data sheet

Plastic pipe, rigid, halogen-free

Item number: 2047721



Dimensions

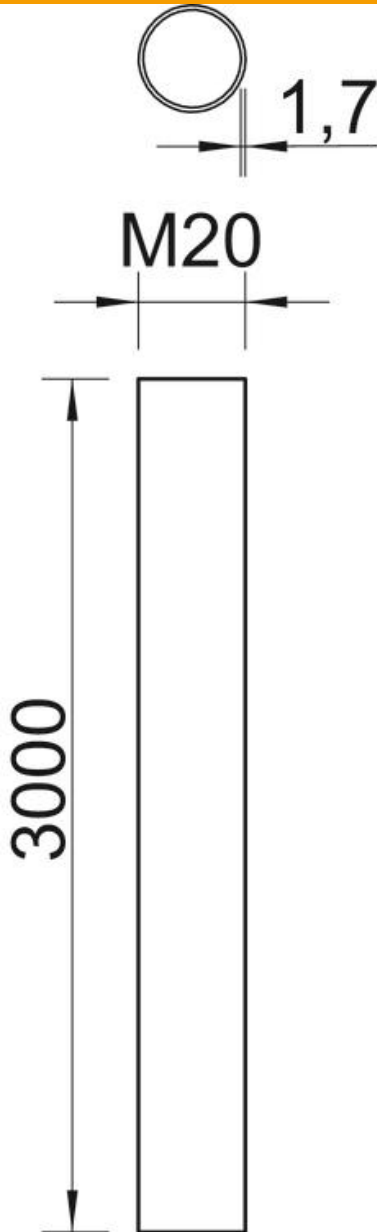

| | |
|------------------|----------|
| Length | 3,000 mm |
| Dimension D | 20 mm |
| Dimension L | 3,000 mm |
| Dimension m (mm) | M20 |
| Dimension t | 1.7 mm |

Technical data

| | |
|-----------------------|-----------------|
| Bending behaviour | rigid |
| Pressure resistance | Heavy (1,250 N) |
| Use temperature, max. | + 90 °C |

Technical data sheet

Plastic pipe, rigid, halogen-free

Item number: 2047721



Technical data

| | |
|-----------------------|-----------------------|
| Use temperature, min. | - 15 °C |
| Size | M20 |
| Halogen-free | yes |
| Classification code | 0 |
| Impact resistance | Heavy (2.0 kg/300 mm) |